


Available Model



Constant Voltage Controller Product List			
Features and Description	Model	Channel	Dimension
<ul style="list-style-type: none"> Constant voltage DC 12V or 24V linear output model can be selected. VR stepless control. A green led indicator to show weather light is connected or not. 	PV-12V12W-1 PV-24V24W-1	1	1
	PV-12V12W-2 PV-24V24W-2	2	2
	PV-12V24W-4 PV-24V60W-4	4	3
	PV-12V12W-1-R/-V PV-24V24W -1-R/-V	1	6
<ul style="list-style-type: none"> External intensity control - Type 1 with PC-RS232 interface, model name comes with "-R" after channel number. External intensity control - Type 2 by DC 0-5V voltage input, model name comes with "-V" after channel number. 0-255 steps external intensity control. 	PV-12V12W-2-R/-V PV-24V24W -2-R/-V	2	7
	<ul style="list-style-type: none"> External power output On/Off or higher voltage strobe control function. Up to 10 KHz frequency by voltage input (N type). Up to 10 KHz frequency by switch open / short. (P type). -O: external light On/Off control function. -S: higher voltage output strobe control function. 	PV-12V12W-1-S/-O PV-24V24W -1-S/-O	1
PV-12V12W-2-S/-O PV-24V24W -2-S/-O		2	12
<ul style="list-style-type: none"> Combined both external intensity and light on/off control function in one unit. 		PV-12V12W-1-SR/-SV PV-24V24W -1-SR/-SV	1
	PV-12V12W-2-SR/-SV PV-24V24W -2-SR/-SV	2	12

Dimension Diagrams

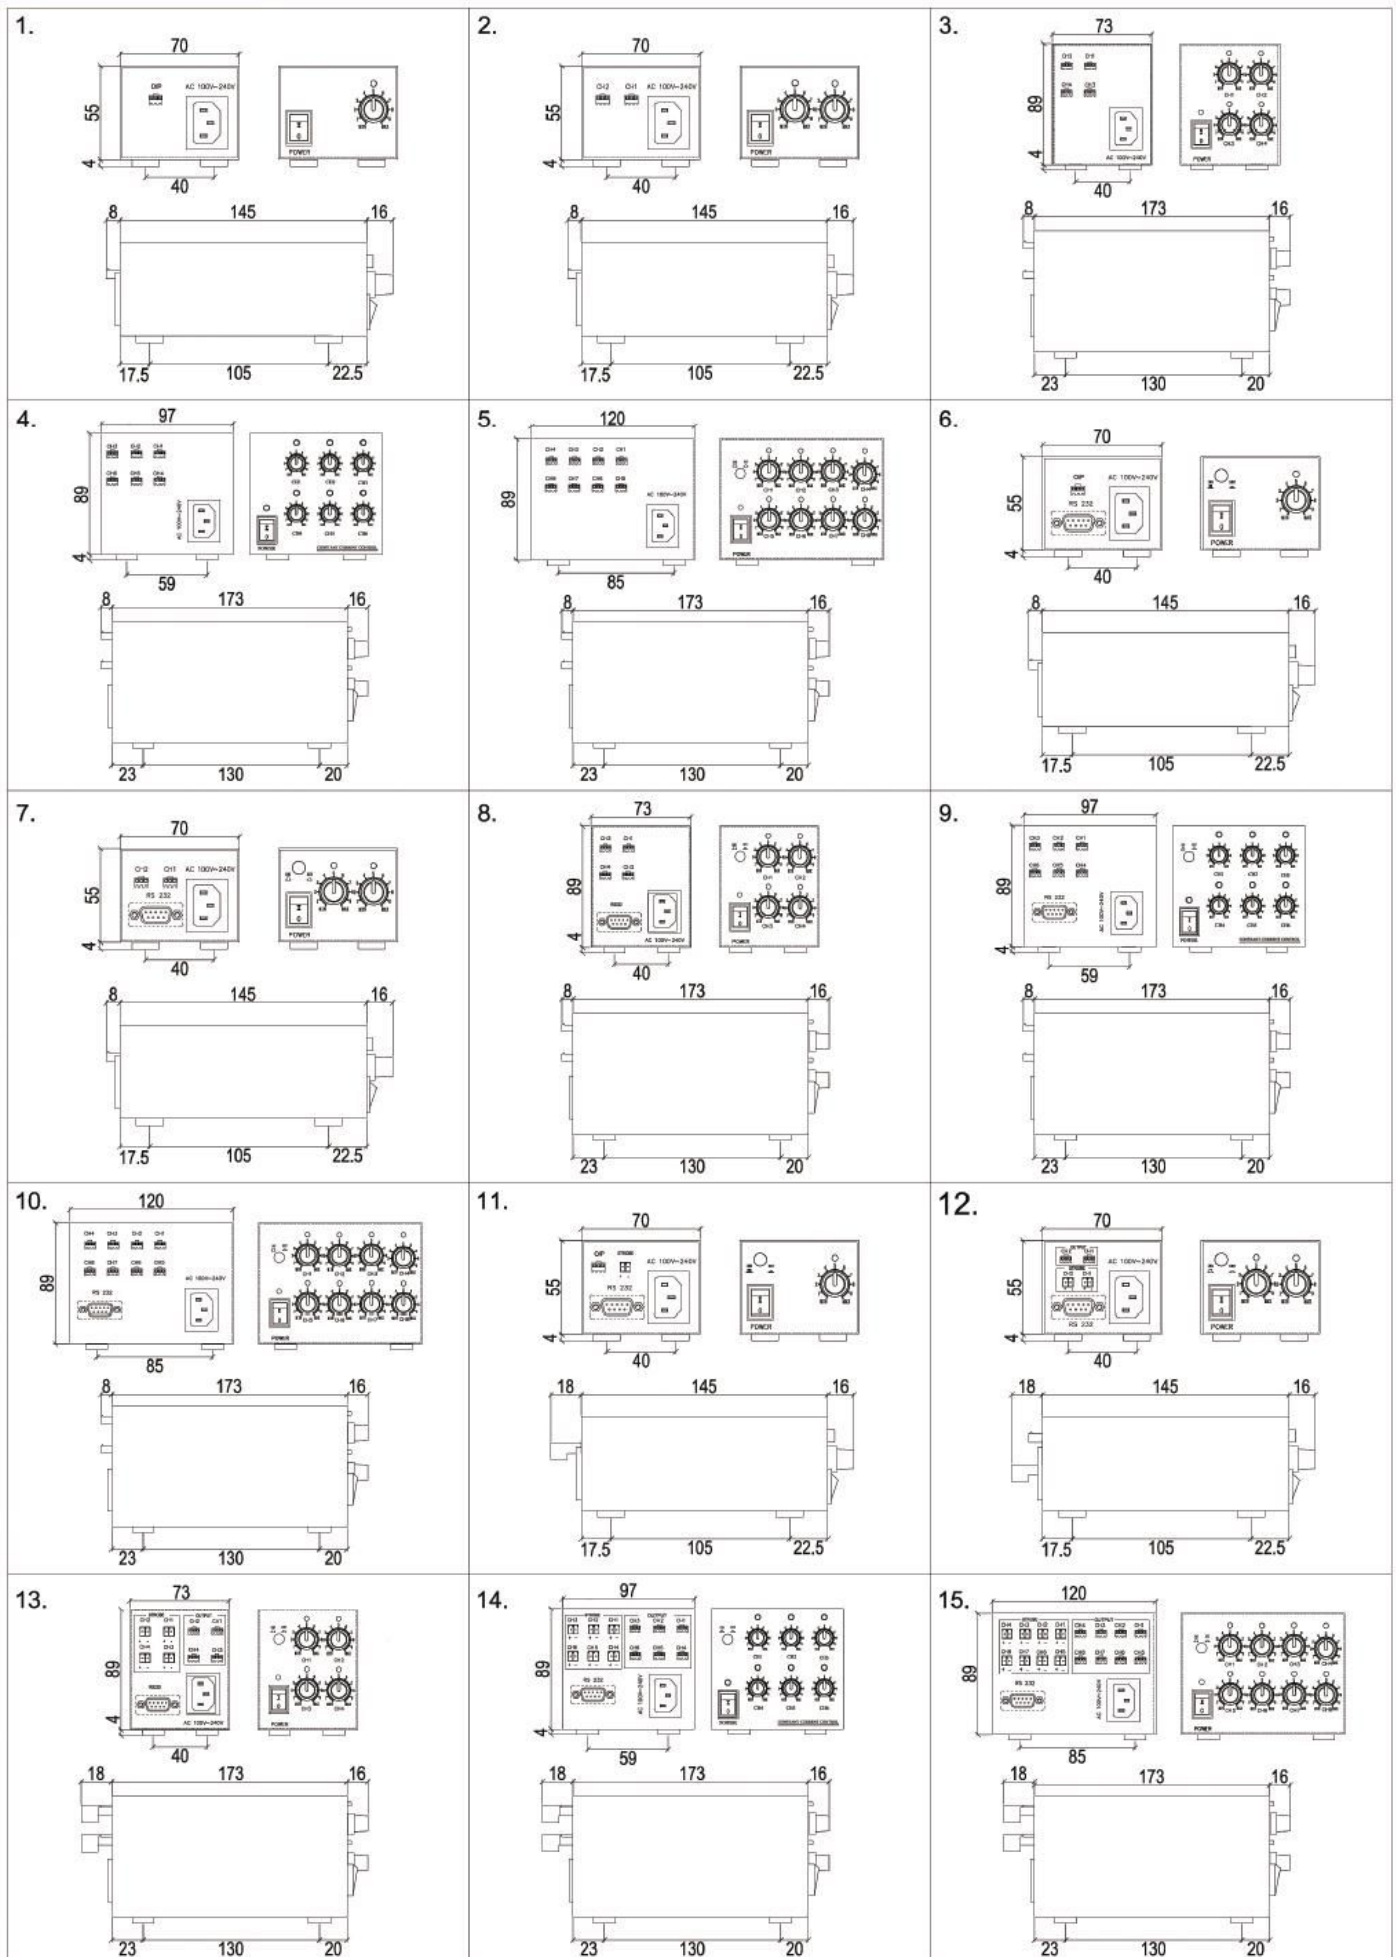

※Specifications and forms are subject to change without notice